

THE FUTURE OF PAVING,
BUILD GREEN ROADS



PRICE LIST



FUTURE IS

TABLE OF CONTENTS

APR™ PRIMARY RANGE

APR 550	6
APR 800	7
APR 850-2S	8
APR 1000-2S	9

RU-m EXTENDED RANGE

RU 120m	12
RU 160m	13
RU 200m	14
RU 260m	15

RU-s EXTENDED RANGE

RU 120s	18
RU 160s	19
RU 200s	20
RU 260s	21

SRU EXTENDED RANGE

SRU 80	23
--------	----

ES EXTENDED RANGE

ES 300	26
ES 500	27
ES 700	28
ES 900	29

SC EXTENDED RANGE

SC RANGE	31
----------	----

PRIMARY RANGE

APR™

Asphalt Pavement Recycler


FEATURES

- Built-in specific shredding programs depending on the type of material
- Ability to process wet material
- One Diesel engine for four pieces of equipment
- Low fuel consumption
- Compact transport dimension
- Low wearing
- Ability to provide electrical power on site
- Low dust and acoustic emissions
- Recovers 100% of RAP

OPTIONS

- Hydraulic hopper extension
- Patented hydraulic pusher system
- GPS
- Electrical weighing system
- Electrical fuel pump
- Electrical grease pump



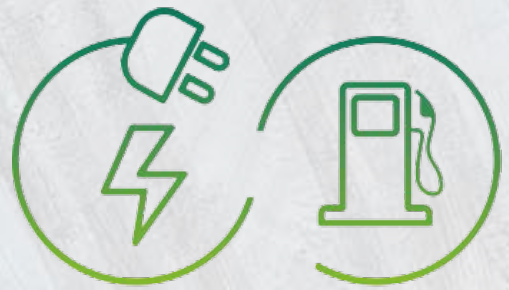

Hybryd power

The APR™ range can operate in full electric mode for **zero emissions** (without Diesel engine)



APR™ 550

Hopper

Capacity: 4 yds³
Length: 9' 10"
Width: 6' 7"

Primary shredder

Type: SC160
Feed opening: 3' 3" x 2' 11"

Oversize conveyor

Width: 1' 8"

Main conveyor

Width: 2' 7"

Finesize conveyor

Width: 2' 11"

Screen

Type: ES400
Deck surface: 10' 6" x 3' 3"
Decks number: 2

Midsize conveyor

Width: 1' 8"

Hybrid power unit

Engine: CAT C4.4 Tier 4 190 hp
Alternator: MeccAlte 135 kVA
Fuel tank capacity: 45 US gal

Output potential

130 US ton/h

INCLUDED FEATURES

- Dust suppression
- Electric sockets 220/380 V
- Wireless remote control
- Overband magnetic separator
- Interchangeable crushing teeth
- Hydraulic output size adjustment
- Screen hopper with flow deviator



STANDARD PLANT \$ ###,###.##

GPS	\$ #,###.##
Electronic weighing system (on screen feeder conveyor belt)	\$ #,###.##
Electronic weighing system (on 3 conveyor belts)	\$ #,###.##
Centralized greasing system	\$ #,###.##
Pump for dust suppression	\$ #,###.##
Pump for filling fuel tank	\$ #,###.##
Overband magnetic separator	\$ #,###.##
Cover for conveyor belts	\$ #,###.##
Customized paint 2 colours	\$ #,###.##
Feed hopper extensions	\$ #,###.##
Hydraulic feed hopper extensions	\$ #,###.##
Hydraulic pusher system	\$ #,###.##

APR™ 800

Hopper

Capacity: 4.5 yds³
Length: 8' 2"
Width: 7' 7"

Primary shredder

Type: SC200
Feed opening: 3' 11" x 2' 11"

Midsize conveyor

Width: 1' 8"

Main conveyor

Width: 2' 7"

Finesize conveyor

Width: 2' 11"

Screen

Type: ES700
Deck surface: 11' 1" x 4' 3"
Decks number: 2

Swing-out conveyor

Width: 1' 8"

Hybrid power unit

Engine: CAT C7.1 Tier 4 265 hp
Alternator: MeccAlte 400 kVA
Fuel tank capacity: 60 US gal

Output potential

170 US ton/h

INCLUDED FEATURES

- Dust suppression
- Electric sockets 220/380 V
- Wireless remote control
- Overband magnetic separator
- Interchangeable crushing teeth
- Hydraulic output size adjustment
- Closed circuit (swing-out conveyor)



STANDARD PLANT

\$ ###,###.##

GPS	\$ ###.##
Electronic weighing system (on screen feeder conveyor belt)	\$ ###.##
Pump for dust suppression	\$ ###.##
Pump for filling fuel tank	\$ ###.##
Customized paint 2 colours	\$ ###.##
Hydraulic feed hopper extensions	\$ ###.##
Hydraulic pusher system	\$ ###.##

APR™ 850-2S

Hopper

Capacity: 4.5 yds³
Length: 8' 2"
Width: 7' 6"

Primary shredder

Type: SC200
Feed opening: 3' 11" x 2' 11"

Midsize conveyor

Width: 1' 8"

Main conveyor

Width: 2' 11"

Finesize conveyor

Width: 2' 11"

Swing-out conveyor

Width: 1' 8"

Screen

Type: ES700
Deck surface: 14' 1" x 4' 3"
Decks number: 2

Secondary shredder

Type: SRU80c
Feed opening: 3' 11" x 2' 11"

Hybrid power unit


Engine: CAT C9.3 Tier 4 380 hp
Alternator: MeccAlte 400 kVA
Fuel tank capacity: 60 US gal

Output potential

200 US ton/h

INCLUDED FEATURES

- Dust suppression
- Electric sockets 220/380 V
- Wireless remote control
- Overband magnetic separator
- Interchangeable crushing teeth
- Hydraulic output size adjustment
- Closed circuit (swing-out conveyor)

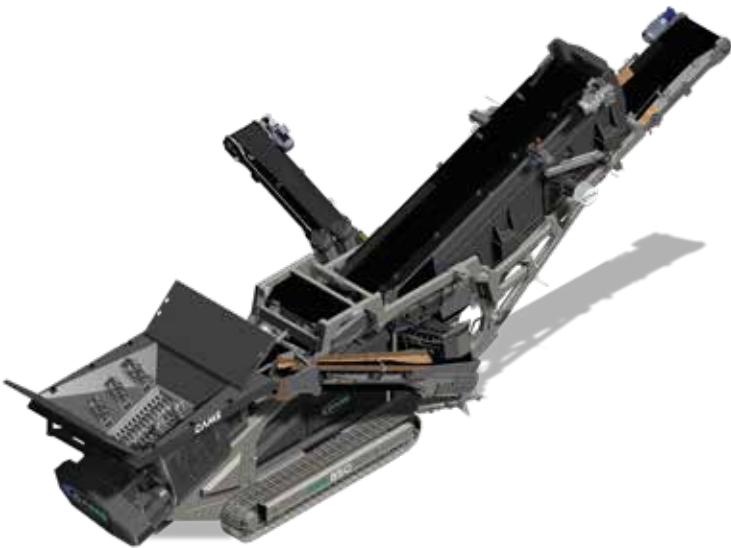

STANDARD PLANT

\$ ###,###.##

GPS	\$ ###,###.##
Electronic weighing system (on screen feeder conveyor belt)	\$ ###,###.##
Pump for dust suppression	\$ ###,###.##
Pump for filling fuel tank	\$ ###,###.##
Customized paint 2 colours	\$ ###,###.##
Hydraulic feed hopper extensions	\$ ###,###.##
Hydraulic fingers pusher system	\$ ###,###.##

APR™ 1000-2S

Hopper

Capacity: 5 yds³

Length: 11' 6"

Width: 7' 6"

Primary shredder

Type: SC260

Feed opening: 4' 11" x 2' 11"

Midsized conveyor

Width: 1' 8"

Oversize conveyor

Width: 2' 11"

Finesize conveyor

Width: 2' 11"

Recirculating conveyor

Width: 1' 8"

Screen

Type: ES900

Deck surface: 17' 5" x 4' 3"

Decks number: 2

Secondary shredder

Type: SRU80c

Feed opening: 3' 11" x 2' 11"

Hybrid power unit

Engine: CAT C9.3 Tier 4 380 hp

Alternator: MeccAlte 400 kVA


Fuel tank capacity: 60 US gal

Output potential

280 US ton/h

INCLUDED FEATURES

- Dust suppression
- Electric sockets 220/380 V
- Wireless remote control
- Overband magnetic separator
- Interchangeable crushing teeth
- Hydraulic output size adjustment
- Closed circuit (swing-out conveyor)

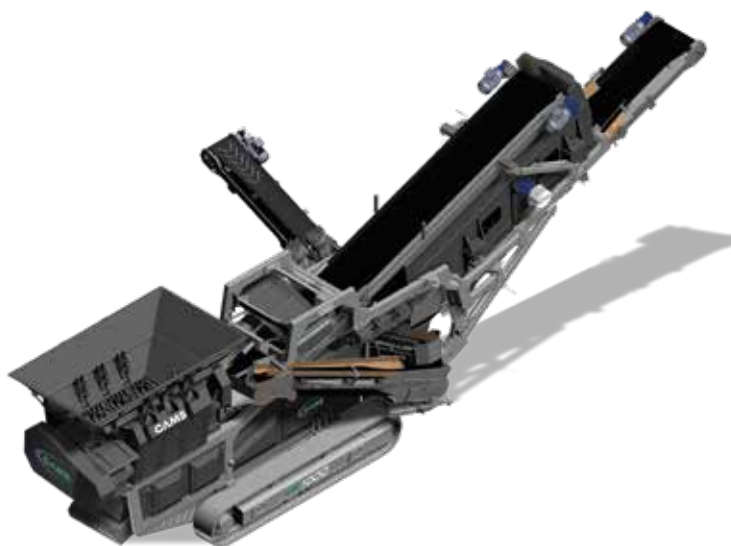

STANDARD PLANT

\$ ###,###.##

GPS

\$ ###.##

Electronic weighing system (on screen feeder conveyor belt)

\$ ###.##

Pump for dust suppression

\$ ###.##

Pump for filling fuel tank

\$ ###.##

Customized paint 2 colours

\$ ###.##

Hydraulic feed hopper extensions

\$ ###.##

Hydraulic pusher system

\$ ###.##

EXTENDED RANGE

RU-m

Recycling Unit mobile


FEATURES

- Built-in specific shredding programs depending on the type of material
- Ability to process wet material
- Low fuel consumption
- Compact transport dimension
- Low wearing
- Ability to provide electrical power on site
- Low dust and acoustic emissions

OPTIONS

- Patented hydraulic pusher system
- GPS
- Electrical weighing system
- Electrical fuel pump
- Electrical grease pump



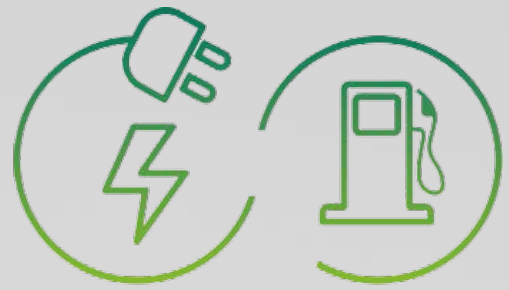

Hybryd power

The RU-m range can operate in full electric mode for **zero emissions** (without Diesel engine)



RU120m

Feeding hopper

Capacity: 2 yds³
Length: 7' 7"
Width: 5' 7"

Primary shredder

Type: SC120
Feed opening: 2' 6" x 2' 11"

Main conveyor

Width: 1' 8"
Length: 16' 5"

Hybrid power unit

Engine: FPT F36 Tier 4 120 hp
Alternator: Linz 80 kVA
Fuel tank capacity: 45 US gal

Output potential

90 US ton/h

Dimensions

Length: 23' 11"
Height: 8' 2"
Width: 8' 2"
Weight: 25,500 lbs

INCLUDED FEATURES

- Dust suppression
- Electric sockets 220/380 V
- Wireless remote control
- Overband magnetic separator
- Interchangeable crushing teeth
- Hydraulic output size adjustment



STANDARD PLANT

- GPS
- Electronic weighing system
- Centralized greasing system
- Pump for dust suppression
- Pump for filling fuel tank
- Cover for conveyor belt
- Customized paint 2 colours
- Feed hopper extensions

\$ ###,###.##

- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##

RU160m

Feeding hopper

Capacity: 4 yds³
Length: 9' 10"
Width: 6' 7"

Primary shredder

Type: SC160
Feed opening: 3' 3" x 2' 11"

Main conveyor

Width: 2' 7"
Length: 22' 12"

Hybrid power unit

Engine: CAT C4.4 Tier 4 190 hp
Alternator: MeccAlte 135 kVA
Fuel tank capacity: 45 US gal

Output potential

130 US ton/h

Dimensions

Length: 21' 12"
Height: 9' 10"
Width: 8' 4"
Weight: 40,000 lbs

INCLUDED FEATURES

- Dust suppression
- Electric sockets 220/380 V
- Wireless remote control
- Overband magnetic separator
- Interchangeable crushing teeth
- Hydraulic output size adjustment



STANDARD PLANT

- GPS
- Electronic weighing system
- Centralized greasing system
- Pump for dust suppression
- Pump for filling fuel tank
- Cover for conveyor belt
- Customized paint 2 colours
- Feed hopper extensions
- Hydraulic feed hopper extensions
- Hydraulic pusher system

\$ ###,###.##

- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##

RU200m

Feeding hopper

Capacity: 4.5 yds³
Length: 10' 6"
Width: 6' 7"

Primary shredder

Type: SC200
Feed opening: 3' 11" x 2' 11"

Main conveyor

Width: 2' 7"
Length: 22' 12"

Hybrid power unit

Engine: FPT N45 Tier 4 120 hp
Alternator: MeccAlte 100 kVA
Fuel tank capacity: 45 US gal

Output potential

200 US ton/h

Dimensions

Length: 22' 4"
Height: 10' 12"
Width: 8' 4"
Weight: 41,000 lbs

INCLUDED FEATURES

- Dust suppression
- Electric sockets 220/380 V
- Wireless remote control
- Overband magnetic separator
- Interchangeable crushing teeth
- Hydraulic output size adjustment



STANDARD PLANT

- GPS
- Electronic weighing system
- Centralized greasing system
- Pump for dust suppression
- Pump for filling fuel tank
- Cover for conveyor belt
- Customized paint 2 colours
- Feed hopper extensions
- Hydraulic pusher system

\$ ###,###.##

- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##

RU 260_m

Feeding hopper

Capacity: 5 yds³
Length: 11' 6"
Width: 6' 7"

Primary shredder

Type: SC260
Feed opening: 4'11" x 2' 11"

Main conveyor

Width: 2' 11"
Length: 26' 3"

Hybrid power unit

Engine: CAT C7.1 Tier 4 265 hp
Alternator: MeccAlte 300 kVA
Fuel tank capacity: 45 US gal

Output potential

280 US ton/h

Dimensions

Length: 34' 7"
Height: 10' 2"
Width: 8' 2"
Weight: 49,600 lbs

INCLUDED FEATURES

- Dust suppression
- Electric sockets 220/380 V
- Wireless remote control
- Overband magnetic separator
- Interchangeable crushing teeth
- Hydraulic output size adjustment



STANDARD PLANT

- GPS
- Electronic weighing system
- Centralized greasing system
- Pump for dust suppression
- Pump for filling fuel tank
- Cover for conveyor belt
- Customized paint 2 colours
- Hydraulic grid for feed hopper
- Sleepers kit
- Feed hopper extensions
- Hydraulic pusher system

\$ ###,###.##

- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##



EXTENDED RANGE

RU-s

Recycling Unit stationary

FEATURES

- Built-in specific shredding programs depending on the type of material
- Ability to process wet material
- Compact transport dimension
- Low wearing
- Electric drive
- Low dust and acoustic emissions

OPTIONS

- Patented hydraulic pusher system
- GPS
- Electrical weighing system
- Electrical grease pump



Electric power

RU120s

Feeding hopper

Capacity: 2 yds³
 Length: 7' 7"
 Width: 5' 7"

Primary shredder

Type: SC120
 Feed opening: 2' 6" x 2' 11"

Main conveyor

Width: 1' 8"
 Length: 19' 8"

Electric drive

Power: 30 kW

Output potential

90 US ton/h

Dimensions

Length: 23' 7"
 Height: 9' 10"
 Width: 8' 2"
 Weight: 17,700 lbs

INCLUDED FEATURES

- Dust suppression
- Wireless remote control
- Overband magnetic separator
- Interchangeable crushing teeth
- Hydraulic output size adjustment



STANDARD PLANT	\$ ###,###.##
Electronic weighing system	\$ #,###.##
Centralized greasing system	\$ #,###.##
Pump for dust suppression	\$ #,###.##
Cover for conveyor belt	\$ #,###.##
Customized paint 2 colours	\$ #,###.##
Belt elongation (per feet)	\$ #,###.##
Feed hopper extensions	\$ #,###.##

RU160s

Feeding hopper

Capacity: 4 yds³
 Length: 9' 10"
 Width: 6' 7"

Primary shredder

Type: SC160
 Feed opening: 3' 4" x 2' 11"

Main conveyor

Width: 2' 8"
 Length: 26' 3"

Electric drive

Power: 45 kW

Output potential

130 US ton/h

Dimensions

Length: 28' 6"
 Height: 8' 10"
 Width: 8' 4"
 Weight: 29,000 lbs

INCLUDED FEATURES

- Dust suppression
- Wireless remote control
- Overband magnetic separator
- Interchangeable crushing teeth
- Hydraulic output size adjustment



STANDARD PLANT

- Electronic weighing system
- Centralized greasing system
- Pump for dust suppression
- Cover for conveyor belt
- Customized paint 2 colours
- Belt elongation (per feet)
- Feed hopper extensions
- Hydraulic pusher system

\$ ###,###.##

- \$ #####
- \$ #####
- \$ #####
- \$ #####
- \$ #####
- \$ #####
- \$ #####
- \$ #####

RU200s

Feeding hopper

Capacity: 4 yds³
 Length: 10' 6"
 Width: 6' 7"

Primary shredder

Type: SC200
 Feed opening: 3' 11" x 2' 11"

Main conveyor

Width: 2' 7"
 Length: 26' 3"

Electric drive

Power: 55 kW

Output potential

200 US ton/h

Dimensions

Length: 29' 4"
 Height: 8' 10"
 Width: 8' 4"
 Weight: 33,000 lbs

INCLUDED FEATURES

- Dust suppression
- Wireless remote control
- Overband magnetic separator
- Interchangeable crushing teeth
- Hydraulic output size adjustment



STANDARD PLANT

- Electronic weighing system
- Centralized greasing system
- Pump for dust suppression
- Cover for conveyor belt
- Customized paint 2 colours
- Belt elongation (per feet)
- Feed hopper extensions
- Hydraulic pusher system

\$ ###,###.##

- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##
- \$ ###.##

RU 260s

Feeding hopper

Capacity: 4 yds³
 Length: 11' 6"
 Width: 6' 7"

Primary shredder

Type: SC260
 Feed opening: 4'11" x 2' 11"

Main conveyor

Width: 2' 11"
 Length: 26' 3"

Electric drive

Power: 70 kW

Output potential


280 US ton/h

Dimensions

Length: 30' 6"
 Height: 10' 2"
 Width: 8' 4"
 Weight: 33,100 lbs

INCLUDED FEATURES

- Dust suppression
- Wireless remote control
- Overband magnetic separator
- Interchangeable crushing teeth
- Hydraulic output size adjustment

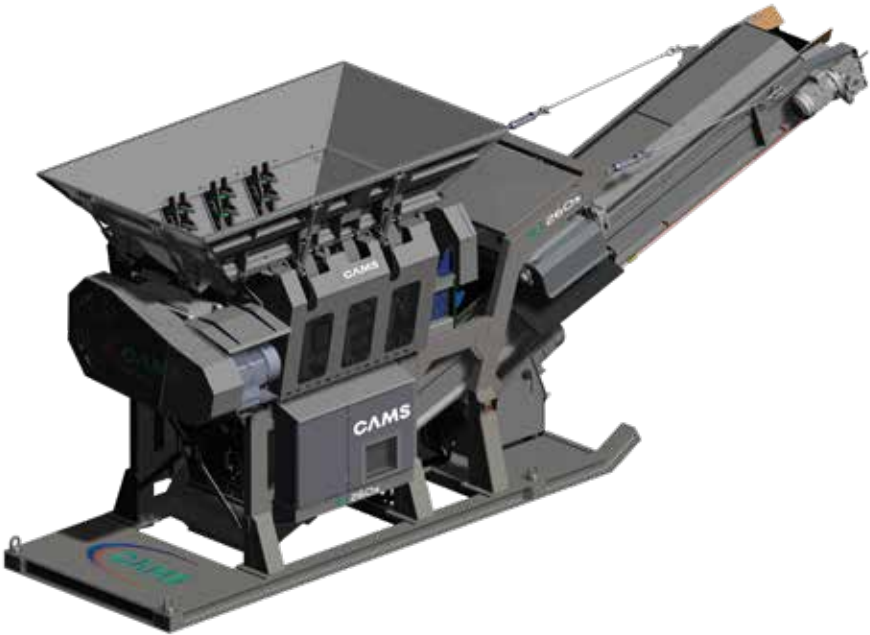

STANDARD PLANT

- Electronic weighing system
- Centralized greasing system
- Pump for dust suppression
- Cover for conveyor belt
- Customized paint 2 colours
- Hydraulic grid for feed hopper
- Sleepers kit
- Belt elongation (per feet)
- Feed hopper extensions
- Hydraulic pusher system

\$ ###,###.##

- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##
- \$ #,###.##

EXTENDED RANGE

SRU

Secondary Recycling Unit

FEATURES

- Built in specific shredding programs depending on the type of material
- Ability to process wet material
- Compact transport dimension
- Low wearing
- Low dust and acoustic emissions
- Recover 100% of RAP

OPTIONS

- GPS
- Electrical weighing system
- Electrical grease pump
- Magnetic separator



Electric power





SRU80



Secondary shredder

Type: SRU80

Feed opening: 3' 11" x 2' 11"

Main conveyor

Width: 1' 11"

Length: 26' 3"

Electric drive

Power: 50 kW

Dimensions

Length: 29' 10"

Height: 10' 2"

Width: 5' 10"

Weight: 12,100 lbs

INCLUDED FEATURES

- Conveyor belt with supports
- Interchangeable armors
- Dust suppression
- Electric sockets 220/380 V
- Electric panel
- Frame and hoppers
- Hydraulic output size adjustment

STANDARD PLANT

\$ ###,###.##

Overband magnetic separator

\$ #,###.##

Hopper and vibrating loader with variable speed

\$ #,###.##

Cover for conveyor belt

\$ #,###.##

SRU80c



Secondary shredder

Type: SRU80

Feed opening: 3' 11" x 2' 11"

Electric drive

Power: 45 kW

Output potential

90 US ton/h

STANDARD PLANT

\$ ###,###.##



EXTENDED RANGE

ES

Electric Screen

FEATURES

- Ability to process wet material
- Compact transport dimension
- Low wearing
- Low dust and acoustic emissions
- Recovers 100% of RAP

OPTIONS

- Feeding hopper
- GPS
- Electrical weighing system
- Electrical grease pump



Electric power

ES3000

Screen

Type: ES300
Deck surface: 8' 2" x 3' 3"
Decks number: 2

Midsize conveyor

Width: 1' 8"
Length: 26' 3"

Electric drive

Power: 25 kW

Oversize conveyor

Width: 1' 8"
Length: 26' 3"

Finesize conveyor

Width: 2' 7"
Length: 26' 3"

INCLUDED FEATURES

- Chassis
- Electric panel



STANDARD PLANT

- Belt elongation (per feet)
- Dust suppression
- Feed hopper and loading belt
- Ladder and walkways
- Cover for conveyor belt
- Customized paint
- Suction system for light parts

\$ ###,###.##

\$ #,###.##
\$ #,###.##
\$ #,###.##
\$ #,###.##
\$ #,###.##
\$ #,###.##
\$ #,###.##

ES500

Screen

Type: ES500
Deck surface: 11' 6" x 3' 11"
Decks number: 2

Midsize conveyor

Width: 1' 8"
Length: 26' 3"

Electric drive

Power: 32 kW

Oversize conveyor

Width: 1' 8"
Length: 26' 3"

Finesize conveyor

Width: 2' 7"
Length: 26' 3"

INCLUDED FEATURES

- Chassis
- Electric panel



STANDARD PLANT

- Belt elongation (per feet)
- Dust suppression
- Feed hopper and vibrating loader
- Ladder and walkways
- Cover for conveyor belt
- Customized paint
- Suction system for light parts

\$ ###,###.##

\$ #,###.##
\$ #,###.##
\$ #,###.##
\$ #,###.##
\$ #,###.##
\$ #,###.##
\$ #,###.##

ES 700

Screen

Type: ES700
Deck surface: 14' 1" x 4' 3"
Decks number: 2

Midsize conveyor

Width: 2' 7"
Length: 26' 3"

Electric drive

Power: 40 kW

Oversize conveyor


Width: 2' 7"
Length: 26' 3"

Finesize conveyor

Width: 2' 7"
Length: 26' 3"

INCLUDED FEATURES

- Chassis
- Electric panel

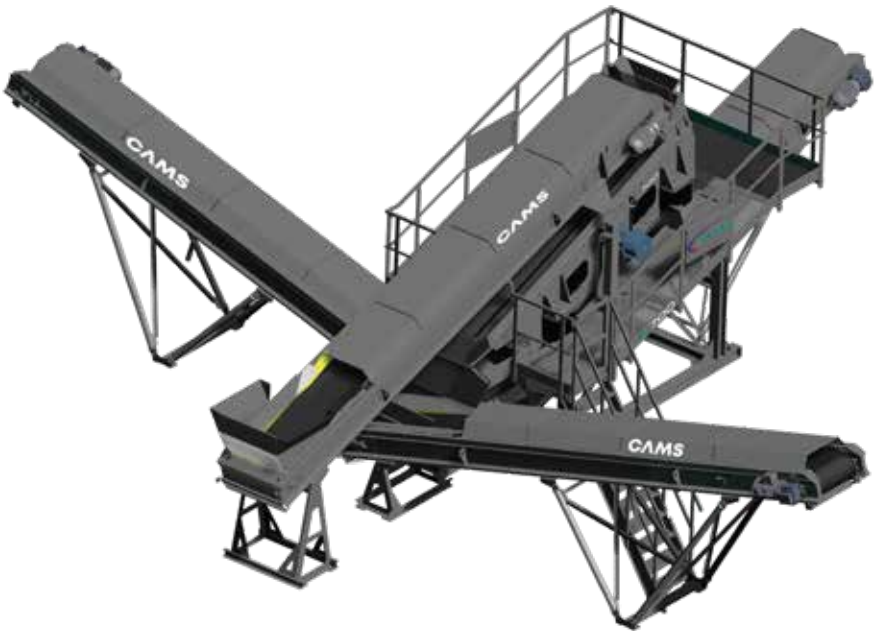

STANDARD PLANT	\$ ###,###.##
Belt elongation (per feet)	\$ #,###.##
Dust suppression	\$ #,###.##
Feed hopper and vibrating loader	\$ #,###.##
Ladder and walkways	\$ #,###.##
Cover for conveyor belt	\$ #,###.##
Customized paint	\$ #,###.##
Suction system for light parts	\$ #,###.##

ES9000

Screen

Type: ES900
Deck surface: 17' 5" x 4' 3"
Decks number: 2

Midsize conveyor

Width: 2' 7"
Length: 26' 3"

Electric drive

Power: 45 kW

Oversize conveyor

Width: 2' 7"
Length: 26' 3"

Finesize conveyor

Width: 3' 3"
Length: 26' 3"

INCLUDED FEATURES

- Chassis
- Electric panel



STANDARD PLANT

Belt elongation (per feet)	\$ #,###.##
Dust suppression	\$ #,###.##
Feed hopper and vibrating loader	\$ #,###.##
Ladder and walkways	\$ #,###.##
Cover for conveyor belt	\$ #,###.##
Customized paint	\$ #,###.##
Suction system for light parts	\$ #,###.##

EXTENDED RANGE

SC

Shredder Core

FEATURES

- Built in specific shredding programs depending on the type of material
- Ability to process wet material
- Compact transport dimension
- Low wearing
- Electric drive
- Low dust and acoustic emissions

OPTIONS

- Hydraulic fingers
- GPS
- Hydraulic output size adjustment
- Electrical grease pump
- Wide range of electric motors



Electric power

SC120

Dimensions

Length: 8' 2"

Height: 3' 5"

Width: 8' 3"

Output potential

90 US ton/h

STANDARD PLANT _____ \$ ##,###.##

Electric panel	\$ #,###.##
Hydraulic output size adjustment	\$ #,###.##
Hopper	\$ #,###.##
Frame	\$ #,###.##

SC160

Dimensions

Length: 10' 8"

Height: 3' 5"

Width: 8' 3"

Output potential

130 US ton/h

STANDARD PLANT _____ \$ ##,###.##

Electric panel	\$ #,###.##
Hydraulic output size adjustment	\$ #,###.##
Hopper	\$ #,###.##
Frame	\$ #,###.##



SC200

Dimensions

Length: 11' 8"

Height: 3' 5"

Width: 8' 3"

Output potential

200 US ton/h

STANDARD PLANT _____ \$ ##,###.##

Electric panel	\$ #,###.##
Hydraulic output size adjustment	\$ #,###.##
Hopper	\$ #,###.##
Frame	\$ #,###.##

SC260

Dimensions

Length: 12' 8"

Height: 3' 5"

Width: 8' 3"

Output potential

280 US ton/h

STANDARD PLANT _____ \$ ##,###.##

Electric panel	\$ #,###.##
Hydraulic output size adjustment	\$ #,###.##
Hopper	\$ #,###.##
Frame	\$ #,###.##

An aerial photograph showing a dark asphalt road with white dashed lines on the right side, bordered by a dense forest of green trees on the left. The text is overlaid on the top left of the image.

**CREATING SUSTAINABLE TECHNOLOGIES
TO GIVE RECLAIMED ASPHALT A SECOND LIFE**

CAMSAMERICA

CAMSAMERICA, Corp.

18 Bridge Street, Office 2A, Brooklin, NY 11201

Mobile Phone: +1-929-570-8437 | +1-929-570-8431

e-mail: info@camsrecycling.com | web: camsrecycling.com