


RU 260m

CAMS™ RU260m is designed and manufactured in compact size. It reaches the highest outputs with the lowest fuel consumption. Thanks to the low rotating speed of the shredding shafts, it produces low dust and acoustic emissions.

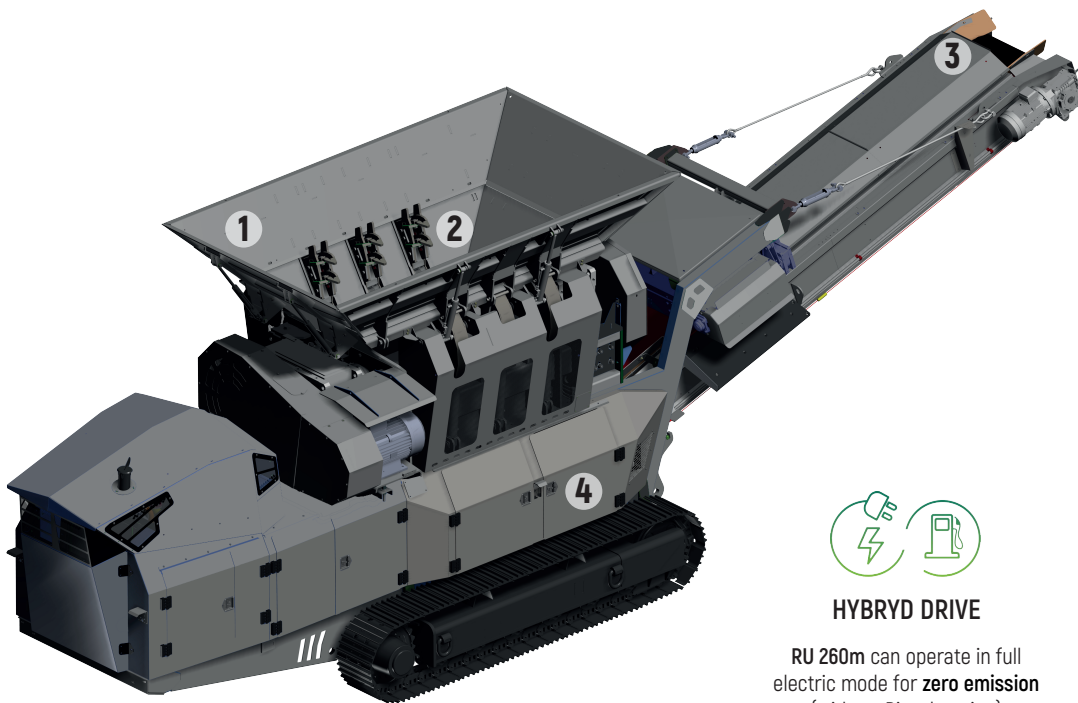

HYBRID DRIVE

RU 260m can operate in full electric mode for **zero emission** (without Diesel engine)

FEATURES

- Built-in specific shredding programs depending on the type of material
- Ability to process wet material
- Low fuel consumption
- Compact transport dimension
- Low wearing
- Ability to provide electrical power on site
- Low dust and acoustic emissions

OPTIONS

- Patented hydraulic pusher system
- GPS
- Electrical weighing system
- Electrical fuel pump
- Electrical grease pump

1 Hopper

Capacity: 5 yds³
Length: 11' 6"
Width: 6' 7"

2 Primary shredder

Type: SC260
Feed opening: 4' 11" x 2' 11"

3 Main conveyor

Width: 2' 11"
Length: 26' 3"

4 Hybrid Power Unit

Engine: CAT C71 Tier 4 265 hp
Alternator: MeccAlte 350 kVA
Fuel tank capacity: 45 US gal

Output potential

280 US ton/h

RU 260m	
Length	34' 7"
Height	10' 2"
Width	8' 2"
Weight	49,600 lbs