

THE FUTURE OF PAVING,
BUILD GREEN ROADS



SECONDARY RECYCLING UNIT



EXTENDED RANGE

SRU

Secondary Recycling Unit

FEATURES

- Built in specific shredding programs depending on the type of material
- Ability to process wet material
- Compact transport dimension
- Low wearing
- Low dust and acoustic emissions
- Recover 100% of RAP


OPTIONS

- GPS
- Electrical weighing system
- Electrical grease pump
- Magnetic separator

Electric power



SRU80

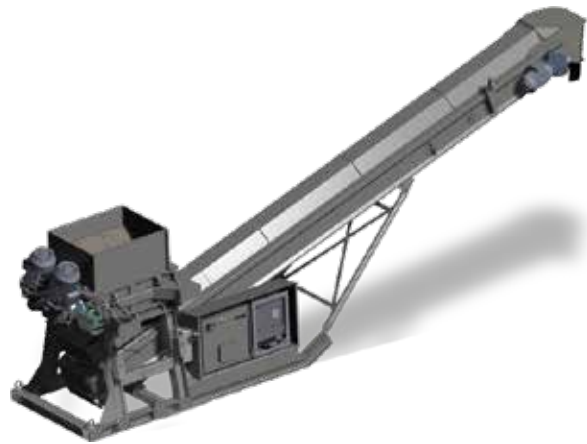

Secondary shredder

Type: SRU80

Feed opening: 3' 11" x 2' 11"

Main conveyor

Width: 1' 11"

Length: 26' 3"

Electric drive

Power: 50 kW

Dimensions

Length: 29' 10"

Height: 10' 2"

Width: 5' 10"

Weight: 12,100 lbs

SRU80c



Secondary shredder

Type: SRU80


Feed opening: 3' 11" x 2' 11"

Electric drive

Power: 45 kW

Output potential

90 US ton/h

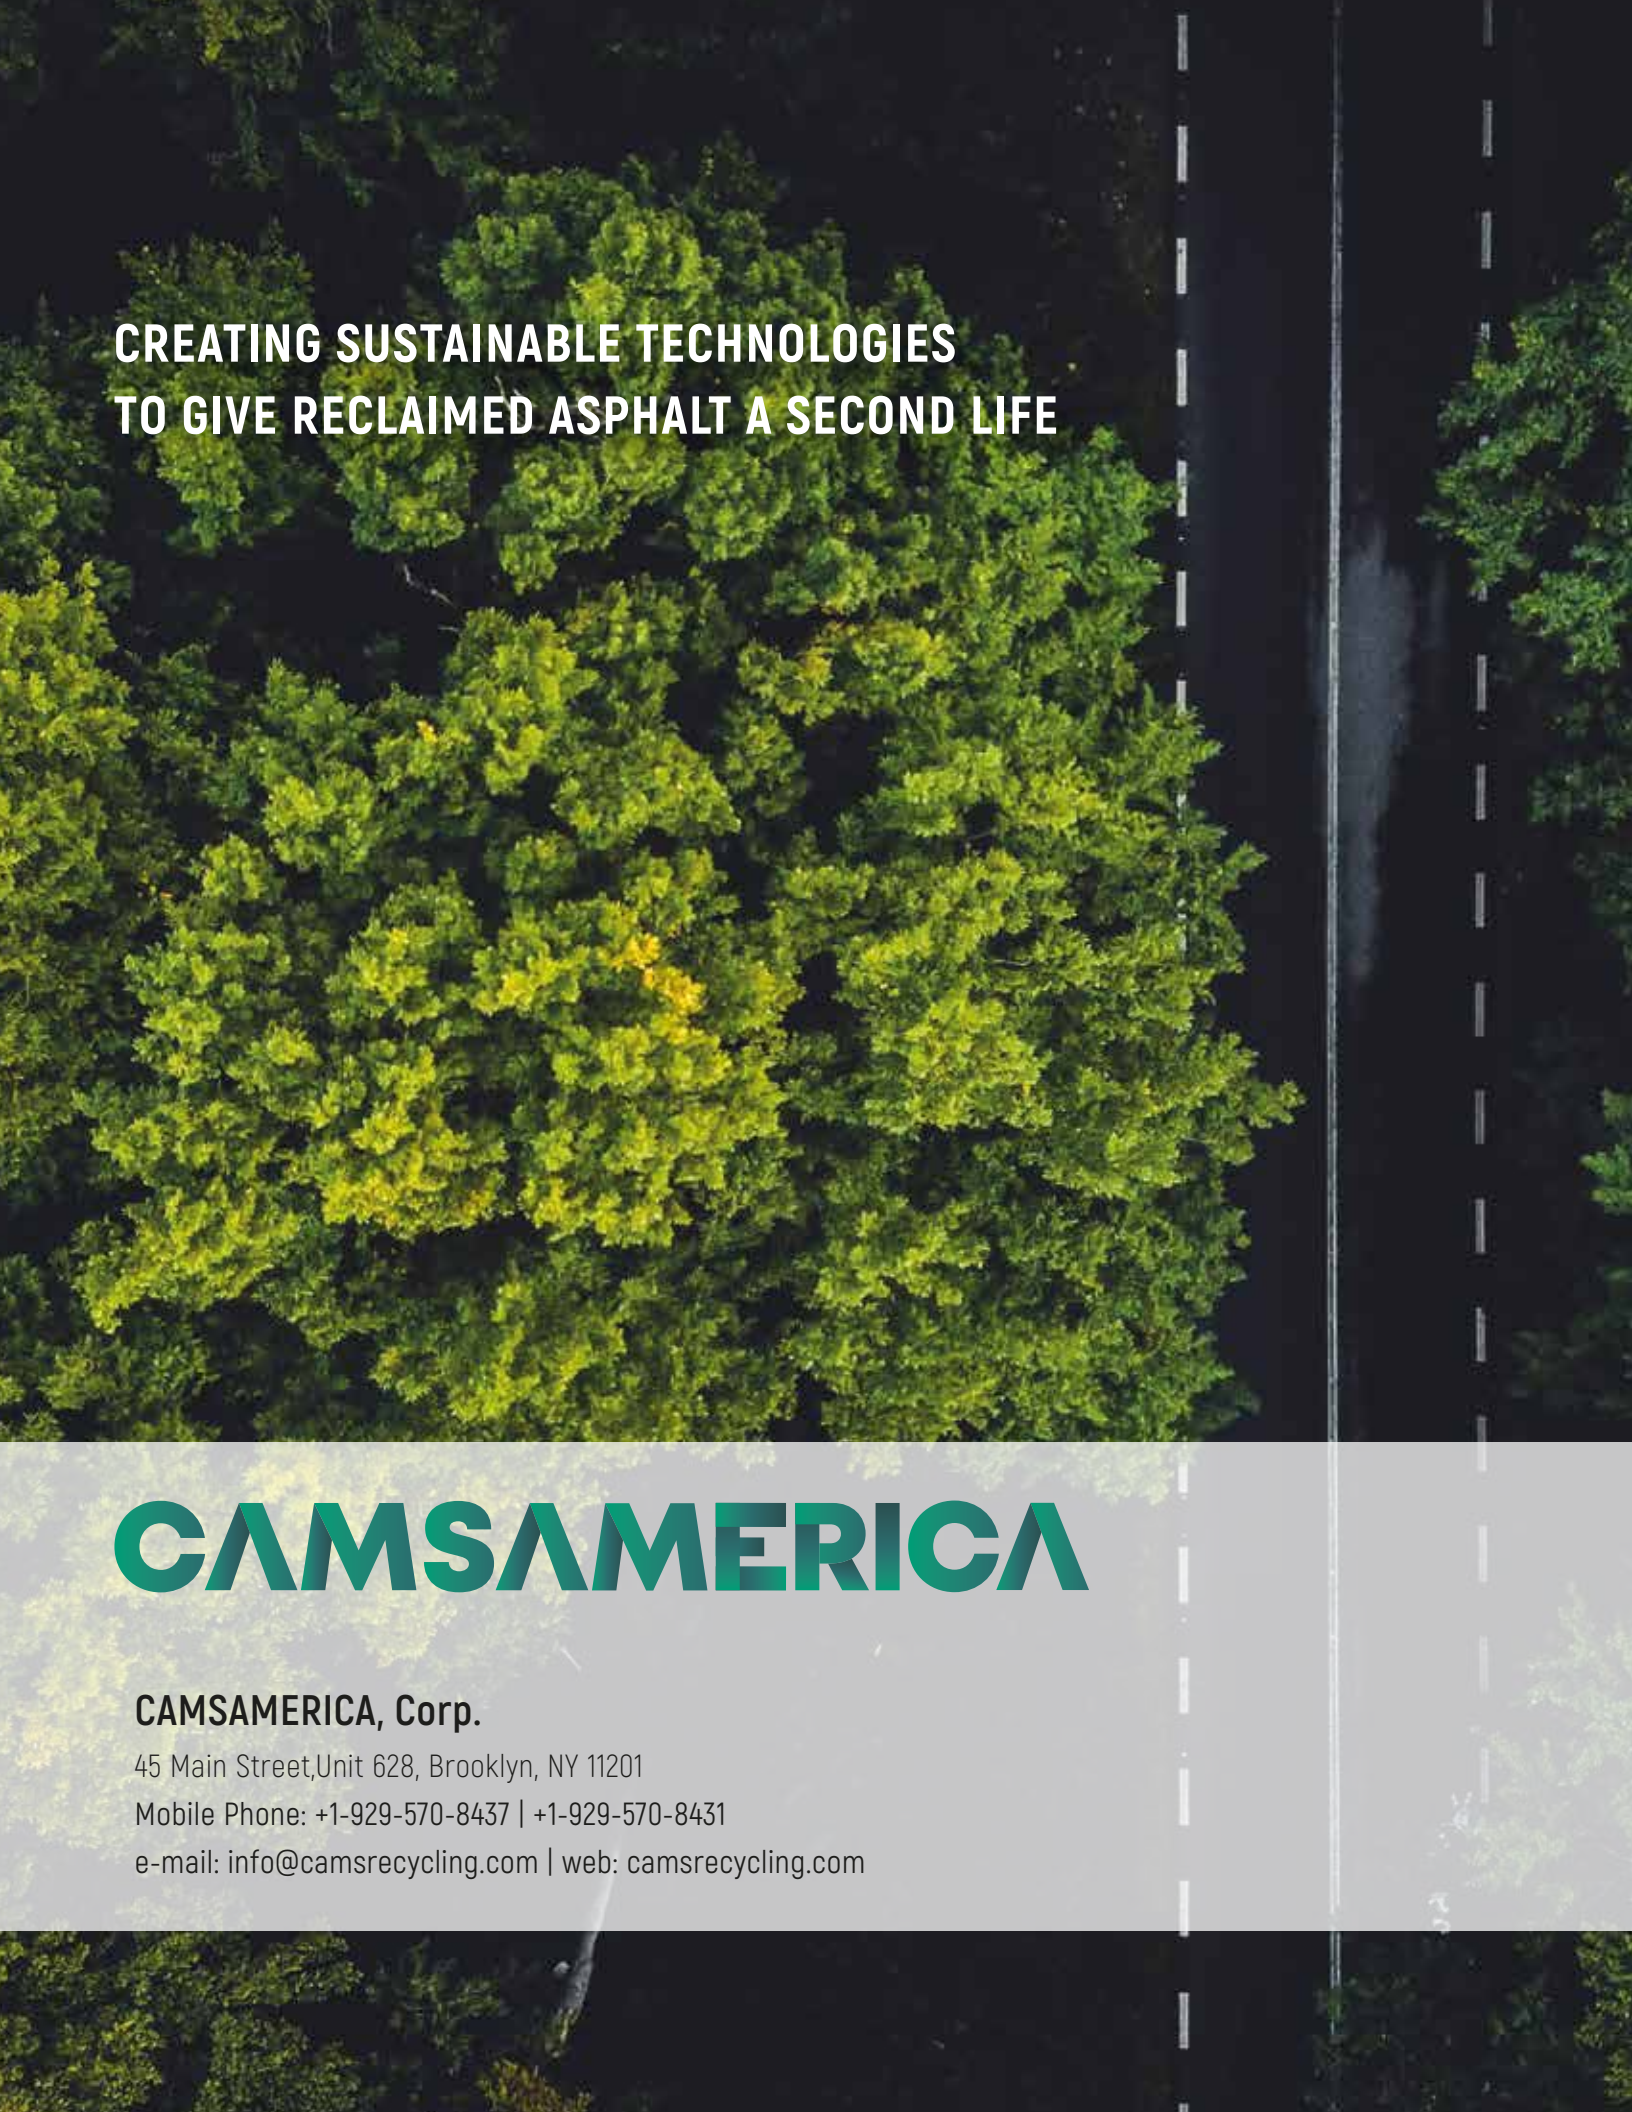An aerial photograph showing a dark asphalt road with white dashed lane markings on the right side. To the left of the road is a dense, lush green forest. The image is used as a background for a promotional flyer.

**CREATING SUSTAINABLE TECHNOLOGIES
TO GIVE RECLAIMED ASPHALT A SECOND LIFE**

CAMSAMERICA

CAMSAMERICA, Corp.

45 Main Street, Unit 628, Brooklyn, NY 11201

Mobile Phone: +1-929-570-8437 | +1-929-570-8431

e-mail: info@camsrecycling.com | web: camsrecycling.com